


# RECIPROCATING PISTON PUMP

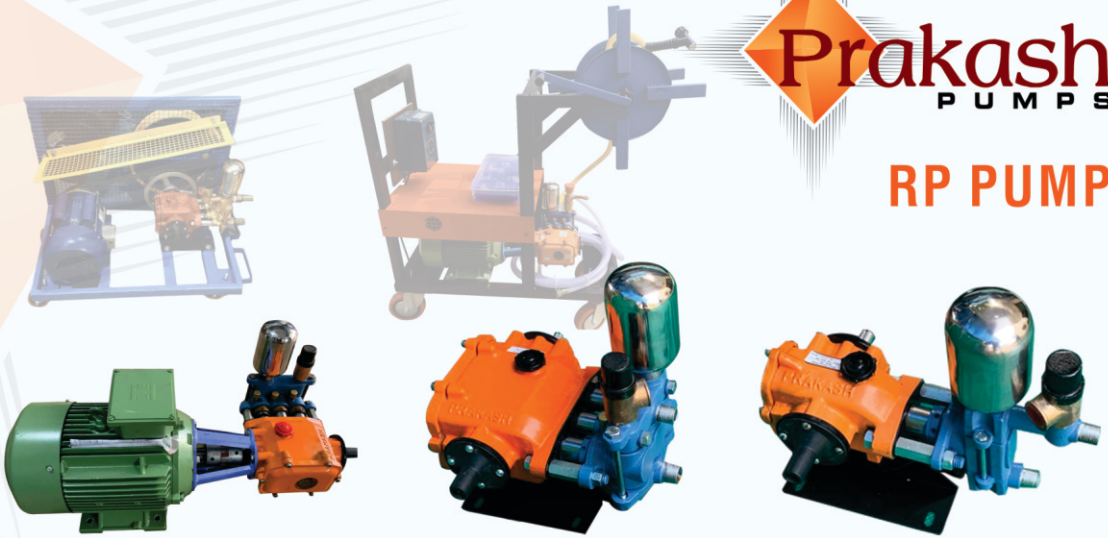

## Features

- Heavy duty and power efficient.
- Develops maximum pressure up to 300/400PSI at 900 RPM.
- All working parts are lubricated by an oil bath.
- Provides by-pass cum pressure regulating valve and pressure vessel.

## Application

- Spraying agrochemicals in the orchards vineyard, farm & the fields.
- Automobiles service station.
- Boiler feed pump.
- Hydro testing for vessels valves etc.
- Spray drying & Jet spray cleaning system.

## Technical Specification

Sr. No.	Description	Model RP 1	Model RP 2	Model RP 3
1	No. of piston	1	2	3
2	Piston stroke	20mm	20mm	20mm
3	Piston Diameter	30mm	30mm	30mm
4	Suction	1/2" BSP	1/2" BSP	3/4" BSP
5	Delivery	1/2" BSP	1/2" BSP	1/2" BSP
6	By-Pass	1/2" BSP	1/2" BSP	1/2" BSP
7	Capacity	11 LPM	22 LPM	36 LPM
8	Pressure	400 PSI	400 PSI	400 PSI
9	Pump Speed	960 RPM	960 RPM	96 RPM
10	Drive	Pulley Drive	Pulley Drive	Pulley Drive
11	Speed ratio	01:01.5	01:01.5	01:01.5
12	Horse Power	1 HP	2 HP	3 HP
13	Overall dimension (LWH)	10"x10"x14"	12"x10"x14"	12"x12"x13"

## Prakash Pumps

J-29/30, 1st Phase, J type Area, GIDC,  
Vapi - 396195, Gujarat, India.  
info@figpumps.com

+91 26029 64267 | +91 94093 01772



Scan QR-Code  
To Visit Website